



Single Bundle, A08031.60

## Single Bundles

For versatility in routing and positioning of light, flexible bundles are your answer.

### Features

- Tight bending radius for easy routing.
- A variety of standard sizes. See chart on left for part numbers and specifications. Dual and quad bundles are found on a separate page in the product catalog.
- The standard output ferrules accept spot lenses accept polarizing caps. (See the Accessories section of the product catalog for more details.)
- Standard input accepts Dichroic color filters, diffusers and ColdVision Series light sources. The bundles can be used with other manufacturer's continuous light sources.
- Support products are available in the Support Apparatus section of the product catalog.
- Custom configurations are available. Lead time is required.
- Manufactured in the USA.

### Bundles

Part No.	Active Input Fiber Diameter	Distal Ferrule Diameter	Tubing Diameter	Bundle Length
A08020.40	.20" (5)	.393" (10)	.39" (10)	40" (1016)
A08020.60	.20" (5)	.393" (10)	.39" (10)	60" (1524)
A08025.40	.25" (6)	.393" (10)	.47" (12)	40" (1016)
A08025.60	.25" (6)	.393" (10)	.47" (12)	60" (1524)
A08031.40	.30" (8)	.393" (10)	.47" (12)	40" (1016)
A08031.60	.30" (8)	.393" (10)	.47" (12)	60" (1524)
A08031.80	.30" (8)	.393" (10)	.47" (12)	80" (2032)
A08051.40	.51" (13)	.625" (16)	.75" (19)	40" (1016)
A08051.60	.51" (13)	.625" (16)	.75" (19)	60" (1524)
A21200	.40" (10)	.507" (13)	.69" (18)	30" (762)

Dimensions in ( ) are in mm

# Single Bundles



Dimensions in ( ) are in mm

**Ringlight Input:** Black Anodized Aluminum

**Bundle Sheathing:** PVC Covered Metal Tubing

**Warning:** This product is manufactured with glass fiber. Not for use in cable/hose carrier. Call SCHOTT to discuss moving cable/hose carrier applications.

**A08020.40 - A08051.60**  
Single Bundles

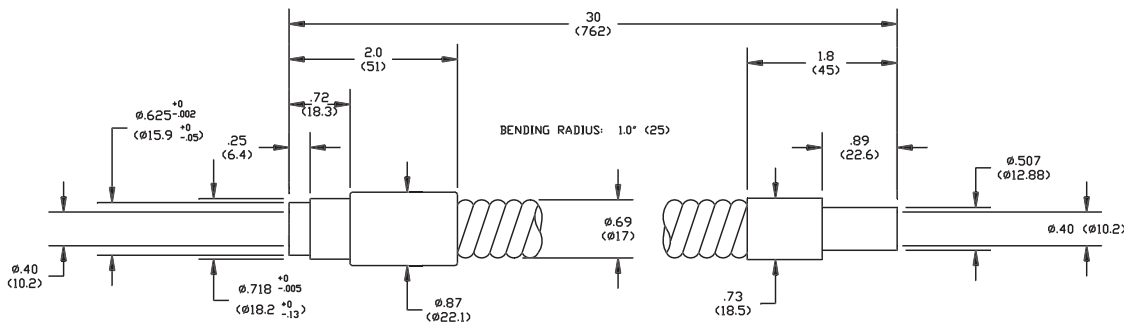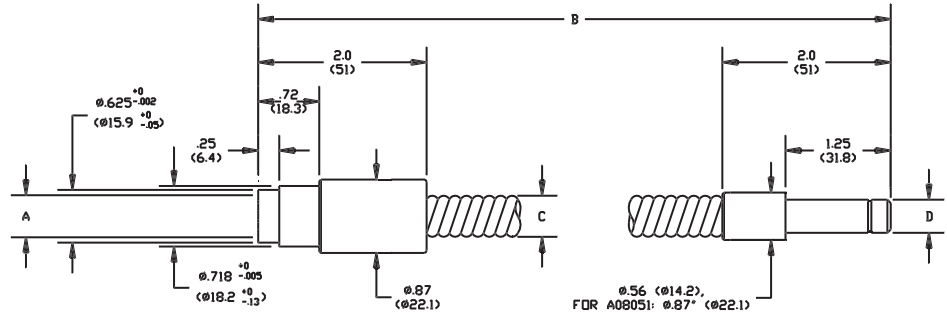

**A21200**  
Bundle

Matrix for A08020.40 - A08051.60 Bundles					
Part No.	A	B	C	Bend Radius	D
A08020.40	.20" (5)	40" (1016)	.39" (10)	.5" (13)	.393" (10)
A08020.60	.20" (5)	60" (1524)	.39" (10)	.5" (13)	.393" (10)
A08025.40	.25" (6)	40" (1016)	.47" (12)	.6" (15)	.393" (10)
A08025.60	.25" (6)	60" (1524)	.47" (12)	.6" (15)	.393" (10)
A08031.40	.30" (8)	40" (1016)	.47" (12)	.6" (15)	.393" (10)
A08031.60	.30" (8)	60" (1524)	.47" (12)	.6" (15)	.393" (10)
A08031.80	.30" (8)	80" (2032)	.47" (12)	.6" (15)	.393" (10)
A08051.40	.51" (13)	40" (1016)	.75" (19)	1.4" (36)	.625" (16)
A08051.60	.51" (13)	60" (1524)	.75" (19)	1.4" (36)	.625" (16)

TECHNICAL SPECIFICATIONS

Fiber Optics  
 SCHOTT North America, Inc.  
 62 Columbus Street  
 Auburn, NY 13021-3137  
 USA  
 Phone: +1315/255-2791  
 Fax: +1315/255-2695  
 E-mail: [fiberoptics.auburn@us.schott.com](mailto:fiberoptics.auburn@us.schott.com)  
[www.us.schott.com/fiberoptics](http://www.us.schott.com/fiberoptics)

